

HCBC 80 Busbar terminal


Rail clamp for connecting flat rails and flexible rails

Technical description

Maximum rail thickness: 40mm. Modular rail clamp in non-magnetic stainless steel for high-current connection between flexible and solid rail such as transformer connections. Its mechanical design guarantees lasting and good connection. Use 2 terminals to guarantee the connection pressure.

Advantages:

Provides easy and fast connection between flat rails
Non-magnetic steel for high power connection
Provides lasting and good connection

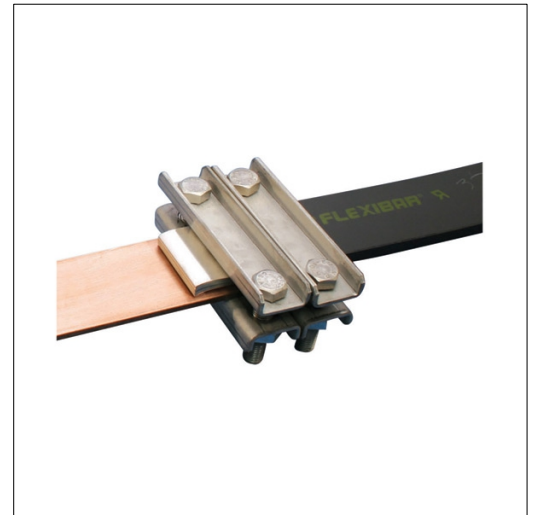

Product name/ Art.nr/ El.number/ GTIN	HCBC 80 Busbar terminal/ 1703163/ 553100/ 7070811205942
According to:	---
Busbar thickness	0 - 20 Millimetre
Busbar width	20 - 80 Millimetre
Suitable for	Flat rail
Width clamp	140 Millimetre
Max. conductor cross section	800 Square millimetre
Max. rated operation current Ie	1600 Ampere
Suitable for round conductor connection	No
Suitable for sector conductor connection	No
Suitable for strip conductor connection	Yes